
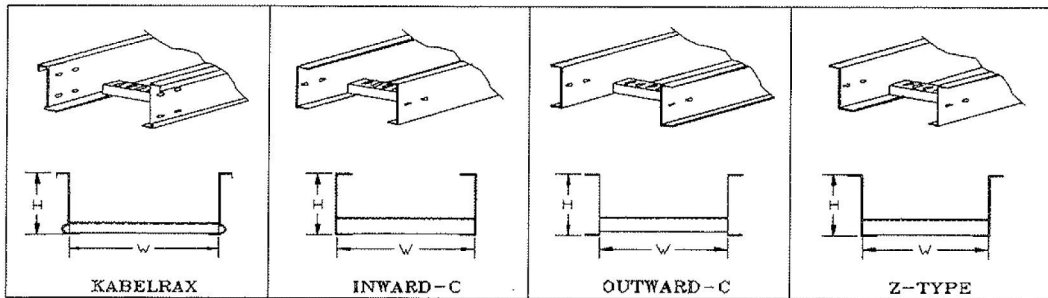


STRAIGHT CABLE LADDER

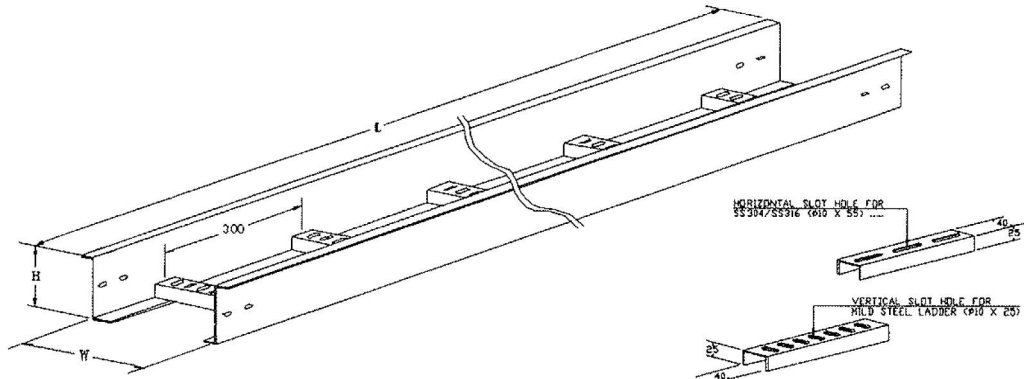

TYPE CODE : K

TYPE CODE : I

TYPE CODE : O

TYPE CODE : Z

Z TYPE		INWARD C		OUTWARD C		KABELRAX		STANDARD DIMENSION		
PART NO.		PART NO.		PART NO.		PART NO.		W(mm)	H(mm)	L(mm)
MPZSL/100/150	MPISL/100/150	MPOSL/100/150	MPKSL/100/150	150	100	3000				
MPZSL/100/200	MPISL/100/200	MPOSL/100/200	MPKSL/100/200	200						
MPZSL/100/300	MPISL/100/300	MPOSL/100/300	MPKSL/100/300	300						
MPZSL/100/450	MPISL/100/450	MPOSL/100/450	MPKSL/100/450	450						
MPZSL/100/600	MPISL/100/600	MPOSL/100/600	MPKSL/100/600	600						
MPZSL/100/750	MPISL/100/750	MPOSL/100/750	MPKSL/100/750	750						
MPZSL/100/900	MPISL/100/900	MPOSL/100/900	MPKSL/100/900	900						
MPZSL/125/150	MPISL/125/150	MPOSL/125/150	MPKSL/125/150	150	125	3000				
MPZSL/125/200	MPISL/125/200	MPOSL/125/200	MPKSL/125/200	200						
MPZSL/125/300	MPISL/125/300	MPOSL/125/300	MPKSL/125/300	300						
MPZSL/125/450	MPISL/125/450	MPOSL/125/450	MPKSL/125/450	450						
MPZSL/125/600	MPISL/125/600	MPOSL/125/600	MPKSL/125/600	600						
MPZSL/125/750	MPISL/125/750	MPOSL/125/750	MPKSL/125/750	750						
MPZSL/125/900	MPISL/125/900	MPOSL/125/900	MPKSL/125/900	900						
MPZSL/150/150	MPISL/150/150	MPOSL/150/150	MPKSL/150/150	150	150	3000				
MPZSL/150/200	MPISL/150/200	MPOSL/150/200	MPKSL/150/200	200						
MPZSL/150/300	MPISL/150/300	MPOSL/150/300	MPKSL/150/300	300						
MPZSL/150/450	MPISL/150/450	MPOSL/150/450	MPKSL/150/450	450						
MPZSL/150/600	MPISL/150/600	MPOSL/150/600	MPKSL/150/600	600						
MPZSL/150/750	MPISL/150/750	MPOSL/150/750	MPKSL/150/750	750						
MPZSL/150/900	MPISL/150/900	MPOSL/150/900	MPKSL/150/900	900						

NOTE : Other sizes are available upon request

Standard Specifications:

- MATERIAL : Hot/Cold Rolled Mild Steel/SS304/SS316
- STD LENGTH : 3000 mm (± 6mm)
- THICKNESS : 1.5mm to 3.0mm
- RUNG SPACING : 300 mm
- FINISHING : HDG (ISO 1461/ BS 729 / ASTM A386)

Example: MPZSL/100/150

- MP : Metal Perforators
 Z : Z type
 SL : Straight Ladder
 100 : 100mm Height
 150 : 150mm Width