


## SNAP ON TERMINALS

COLOUR CODING OF INSULATION SLEEVE 1.5 - RED, 2.5 - BLUE, 4 - 6 - YELLOW

Cable mm <sup>2</sup>	Dimensions									Product Code
	D	J	A	C	F	J1	L	C1		
1.5	6.6	16	2.4	3.2	0.4	-	-	-	RLSP - 001	
1.5	6.6	16	2.4	3.2	0.4	10	21	4.8	RLSP - 002	
2.5	6.6	16	3.1	3.9	0.4	-	-	-	RLSP - 003	
2.5	6.6	16	3.1	3.9	0.4	10	21	5.5	RLSP - 004	
4-6	6.6	19	3.8	5.5	0.8	-	-	-	RLSP - 005	
4-6	6.6	19	3.8	5.5	0.8	14	26	7.1	RLSP - 006	

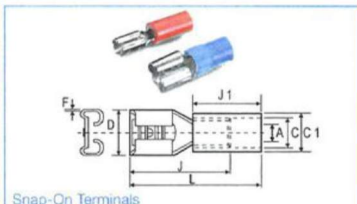

## COPPER PIN TYPE TERMINALS


Cable mm <sup>2</sup>	Dimensions							TYPE	Product Code
	A	C	D	F	B	G+H	J		
1.5	1.6	3.2	1.9	0.8	5	10	17	I	RLP-001
2.5	2.3	3.9	1.9	0.8	5	10	17	I	RLP-002
4	2.9	4.9	2.7	1	6	10	20	I	RLP-003
6	3.6	5.6	2.7	1	6	10	20	I	RLP-004
6	4	6	2.7	1	6	10	20	I	RLP-005
10	4.5	6.7	4.3	1.1	8	12	22	II	RLP-006
16	5.8	8.2	5.5	1.2	10	13	26	II	RLP-007
25	7.5	11.1	7.2	1.8	11	15	33	II	RLP-008
35	9	12.6	8.2	1.8	12	15	33	II	RLP-009
50	10.5	14.1	9	1.8	16	17	41	II	RLP-010
70	12	16	10	2	16	16	46	II	RLP-011
95	13.5	18.1	10	2.3	20	20	51	II	RLP-012



## COPPER INSULATED PIN TYPE TERMINALS

COLOUR CODING OF INSULATION SLEEVE 1.5 - RED, 2.5 - BLUE, 4 - 6 - YELLOW

Cable mm <sup>2</sup>	Dimensions										TYPE	Product Code
	A	C	D	F	B	G+H	J	C1	J1			
1.5	1.6	3.2	1.9	0.8	5	10	17	4.8	10	I	RLPI - 01	
2.5	2.3	3.9	1.9	0.8	5	10	17	5.5	10	I	RLPI - 02	
4	2.9	4.9	2.7	1	6	10	20	7.1	14	I	RLPI - 03	
6	3.6	5.6	2.7	1	6	10	20	7.1	14	I	RLPI - 04	
6	4	6	2.7	1	6	10	20	7.9	14	I	RLPI - 05	
10	4.5	6.7	4.3	1.1	8	12	22	7.9	16	II	RLPI - 06	
16	5.8	8.2	5.5	1.2	10	13	26	10	20	II	RLPI - 07	

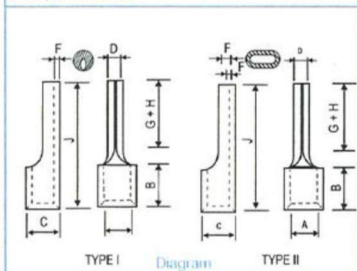

## FORK TYPE COPPER INSULATED TERMINALS

Cable mm <sup>2</sup>	Stud Hole E	Dimensions									Non Insulated			Insulated		
		A	C	D	F	B	H	J	L1	Product Code	C1	J1	L3	Product Code		
1.5	5.1	1.6	3.2	8	0.8	5	10	21	17	RLF - 01	4.8	10	27	RLFI - 01		
	3.5	1.6	3.2	6.8	0.8	4	4.8	13	8.8	RLF - 02	4.8	10	20.8	RLFI - 02		
	3	2	2.8	6.2	0.4	5	3.1	13	10.5	RLF - 03	4.8	10	20.5	RLFI - 03		
2.5	3.5	2.3	3.9	6.5	0.8	5	4.3	15	11.8	RLF - 04	5.5	10	21.8	RLFI - 04		
	5	2.6	4.6	10.6	1.6	6.2	6.2	21	12.4	RLF - 05	5.5	10	20	RLFI - 05		
4-6	3.1	3.5	5.5	6	1	6	5.5	15	11.5	RLF - 06	7.1	14	27.5	RLFI - 06		
	3.5	3.5	5.5	6	1	6	5	15	11	RLF - 07	7.1	14	27	RLFI - 07		
10	6.5	4.5	6.9	16	1.2	8	11	27	19	RLF - 08	7.9	16	35	RLFI - 08		
	8.2	4.5	6.9	16	1.2	8	11	27	19	RLF - 09	7.9	16	35	RLFI - 09		

