


# TRAY - OUTSIDE RISER 90°


PART NO	W(mm)	H(mm)	R (mm)	MATERIAL & FINISHING
MPTUTOR90/15/50	50	13 15 20 50	R200	Mild Steel, SS 304, SS 316 Thickness 1.5 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTUTOR90/15/100	75			
MPTUTOR90/15/100	100			
MPTUTOR90/15/150	150			
MPTUTOR90/15/200	200			

NOTE : Other sizes are available upon request

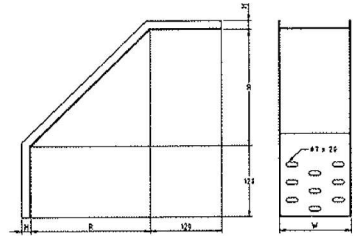


PART NO	W(mm)	H(mm)	R (mm)	MATERIAL & FINISHING						
MPTTHOR90/50/75	75	50	R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386						
MPTTHOR90/50/100	100									
MPTTHOR90/50/150	150									
MPTTHOR90/50/200	200									
MPTTHOR90/75/100	100	75			R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386				
MPTTHOR90/75/150	150									
MPTTHOR90/75/200	200									
MPTTHOR90/75/300	300	100					R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386		
MPTTHOR90/100/100	100									
MPTTHOR90/100/150	150									
MPTTHOR90/100/200	200	300							R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTTHOR90/100/300	300									

NOTE : Other sizes are available upon request

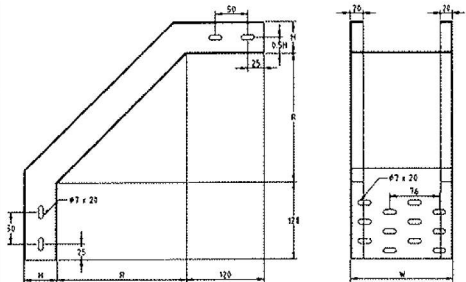


PART NO	W(mm)	H(mm)	R (mm)	MATERIAL & FINISHING						
MPTRF45OR90/50/75	75	50	R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386						
MPTRF45OR90/50/100	100									
MPTRF45OR90/50/150	150									
MPTRF45OR90/50/200	200									
MPTRF45OR90/75/100	100	75			R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386				
MPTRF45OR90/75/150	150									
MPTRF45OR90/75/200	200									
MPTRF45OR90/75/300	300	100					R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386		
MPTRF45OR90/100/100	100									
MPTRF45OR90/100/150	150									
MPTRF45OR90/100/200	200	300							R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTRF45OR90/100/300	300									

NOTE : Other sizes are available upon request

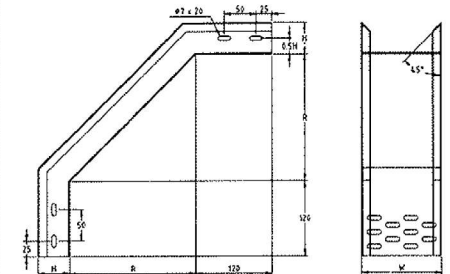

PART NO	W(mm)	H(mm)	R (mm)	MATERIAL & FINISHING						
MPTFROR90/50/75	75	50	R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386						
MPTFROR90/50/100	100									
MPTFROR90/50/150	150									
MPTFROR90/50/200	200									
MPTFROR90/75/100	100	75			R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386				
MPTFROR90/75/150	150									
MPTFROR90/75/200	200									
MPTFROR90/75/300	300	100					R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386		
MPTFROR90/100/100	100									
MPTFROR90/100/150	150									
MPTFROR90/100/200	200	300							R200 - R300	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTFROR90/100/300	300									

NOTE : Other sizes are available upon request

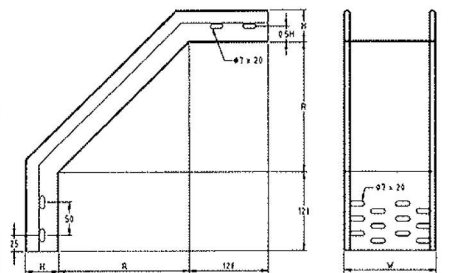

## REMARKS:

MP : METAL PERFORATORS  
 T : TRAY  
 OR90 : OUTSIDE RISER 90°  
 UT : U TYPE  
 TH : TROUGH TYPE  
 RF45 : RETURN FLANGE 45°  
 FR : FULL RTN FLG

## EXAMPLE 1: MPTUTOR90/15/100

METAL PERFORATORS  
 TRAY U TYPE OUTSIDE RISER 90°  
 15H X 100W

## EXAMPLE 1: MPTTHOR90/50/200

METAL PERFORATOR  
 TRAY TROUGH TYPE OUTSIDE RISER 90°  
 50H X 200W