


# TRAY - STRAIGHT REDUCER


PART NO	W(mm)	W1(mm)	H(mm)	MATERIAL & FINISHING
MPTUTSR/15/75-50	75	50	13 15 20 50	Mild Steel, SS 304, SS 316 Thickness 1.5 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTUTSR/15/100-75	100	75		
MPTUTSR/15/150-100	150	100		
MPTUTSR/15/200-150	200	150		
MPTUTSR/15/300-200	300	200		

NOTE : Other sizes are available upon request

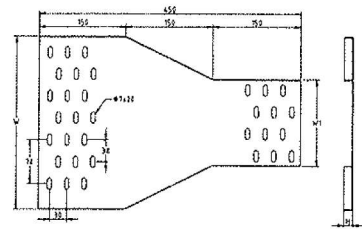


PART NO	W(mm)	W1(mm)	H(mm)	MATERIAL & FINISHING
MPTTHSR/50/100-75	100	75	50	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTTHSR/50/150-100	150	100		
MPTTHSR/50/200-150	200	150		
MPTTHSR/50/300-200	300	200		
MPTTHSR/75/100-75	100	75	75	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTTHSR/75/150-100	150	100		
MPTTHSR/75/200-150	200	150		
MPTTHSR/75/200-300	300	200		
MPTTHSR/100/100-75	100	75	100	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTTHSR/100/150-100	150	100		
MPTTHSR/100/150-200	200	150		
MPTTHSR/100/300-200	300	200		

NOTE : Other sizes are available upon request

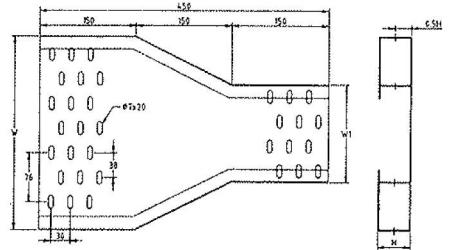


PART NO	W(mm)	W1(mm)	H(mm)	MATERIAL & FINISHING
MPTRF45SR/50/100-75	100	75	50	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTRF45SR/50/150-100	150	100		
MPTRF45SR/50/200-150	200	150		
MPTRF45SR/50/300-200	300	200		
MPTRF45SR/75/100-75	100	75	75	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTRF45SR/75/150-100	150	100		
MPTRF45SR/75/200-150	200	150		
MPTRF45SR/75/300-200	300	200		
MPTRF45SR/100/100-75	100	75	100	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTRF45SR/100/150-100	150	100		
MPTRF45SR/100/200-150	200	150		
MPTRF45SR/100/300-200	300	200		

NOTE : Other sizes are available upon request

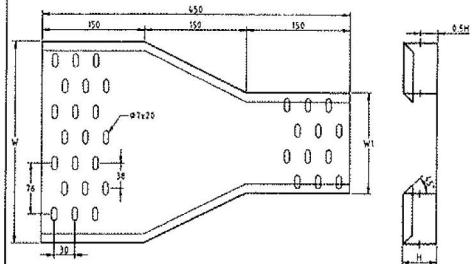

PART NO	W(mm)	W1(mm)	H(mm)	MATERIAL & FINISHING
MPTFRSR/50/100-75	100	75	50	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTFRSR/50/150-100	150	100		
MPTFRSR/50/200-150	200	150		
MPTFRSR/50/300-200	300	200		
MPTFRSR/75/100-75	100	75	75	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTFRSR/75/150-100	150	100		
MPTFRSR/75/200-150	200	150		
MPTFRSR/75/300-200	300	200		
MPTFRSR/100/100-75	100	50	100	Mild Steel, SS 304, SS 316 Thickness 1.5 to 2.0 mm HDG Accordance to ISO 1461 / BS 729 / ASTM A386
MPTFRSR/100/150-100	150	100		
MPTFRSR/100/200-150	200	150		
MPTFRSR/100/300-200	300	200		

NOTE : Other sizes are available upon request

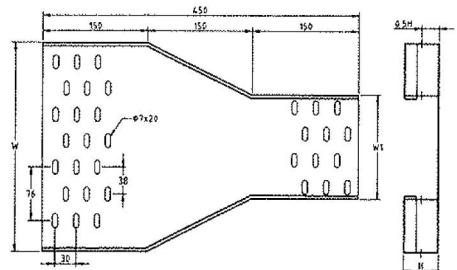

## REMARKS:

MP : METAL PERFORATORS  
T : TRAY  
SR : STRAIGHT REDUCER  
UT : U TYPE  
TH : TROUGH TYPE  
RF45 : RETURN FLANGE 45°  
FR : FULL RTN FLG

EXAMPLE 1: MPTUTSR/15/100  
METAL PERFORATORS  
TRAY U TYPE STRAIGHT REDUCER  
15H X 100W

EXAMPLE 1: MPTTHSR/50/200  
METAL PERFORATOR  
TRAY TROUGH TYPE STRAIGHT REDUCER  
50H X 200W